LAMELY - MŘÍŽKY

Vnímej

pocit kovu

STAVES
OPEN CELL

atena®

STROPNÍ PODHLEDY A KOVOVÁ OPLÁŠTĚNÍ

Vnímej
pocit kovu

LAMELY A MŘÍŽKY
STAVES AND OPEN CELL

ZAHAKOVACÍ LAMELY
STAVES WITH CARRIER

SAMONOSNÉ LAMELY
SELF-SUPPORTING STAVES

MŘÍŽKY
OPEN CELL

atena®

S

Lamely Atena série S jsou obzvlášť scénografické a představují dokonale krabicový tvar, který podhledu dodává jedinečný estetický efekt umocněný širokou mezerou.

Kombinace těchto lamel s technickými spárami umožňuje pomocí hry barev maximální personalizaci prostředí.

The S staves, with their peculiar 'boxed' shape, give to the false ceiling a unique effect, underlined by the presence of a large gap between one and the other.

They are extremely versatile and can be combined with their technical shutters, offering a particular aesthetic game of colours and shadows.

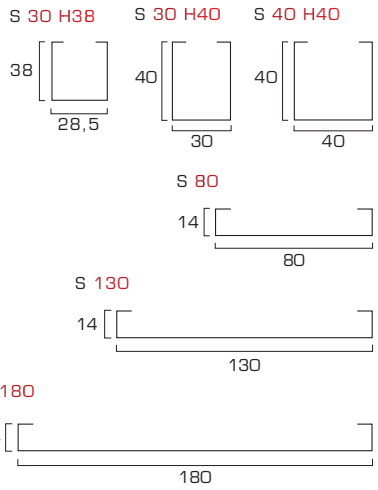

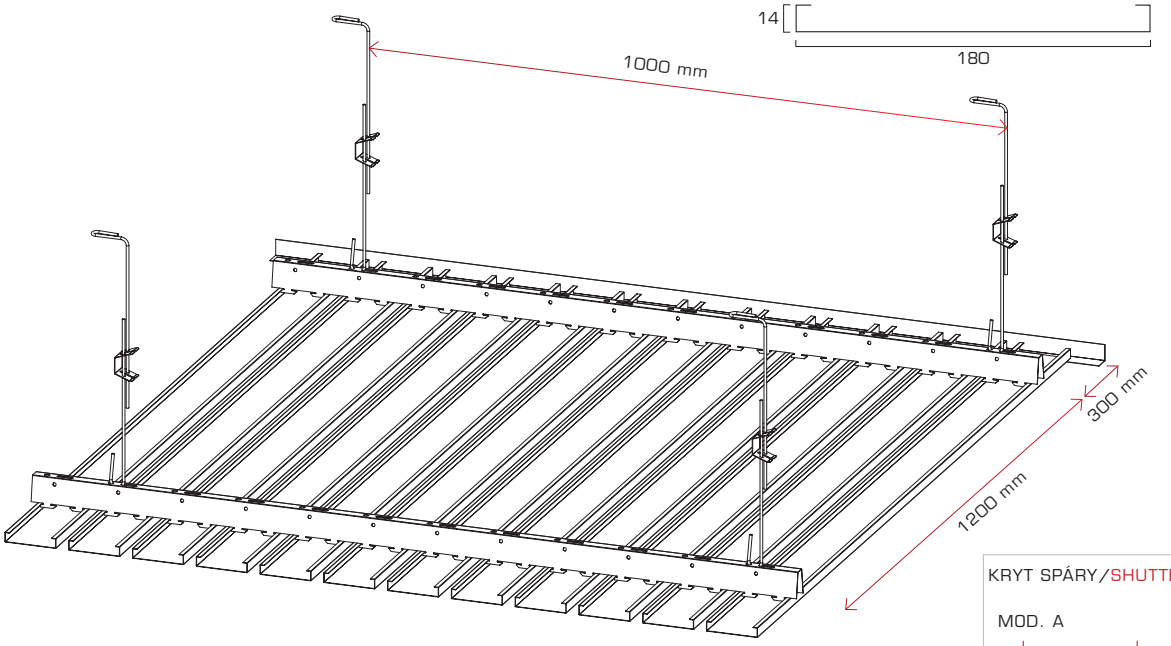

KRYT SPÁRY/SHUTTER

MOD. A



MOD. B



NOSNÍK/CARRIER TE (S30 - S80 - S130 - S180)



NOSNÍK/CARRIER TE40



Proměnlivá vzdálenost s minimální mezerou 20 mm | Variable distance - minimum gap 20 mm

ŘEŠENÍ BEZ KRYTÉ SPÁRY
STAVES WITHOUT SHUTTER

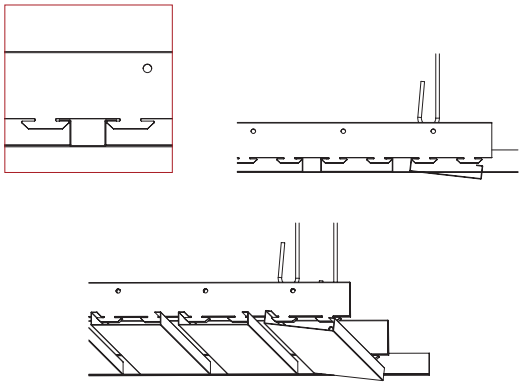

ŘEŠENÍ S KRYTOU SPÁROU
STAVES WITH SHUTTER

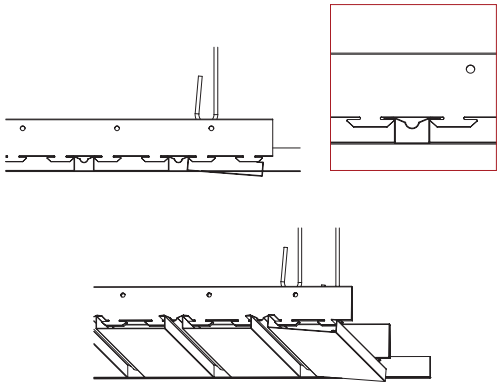

POPIS / DESCRIPTION

TYP
Zahakovací lamely

OBVODOVÉ PROFILY
Obvodový profil “L” - “Dvojité L” - “C”
Dle rozměrů místnosti

ZAVĚŠENÍ
Standardní s dvojitou pružinou

BARVY | POVRCHY | DĚROVÁNÍ
Předbarvený hliník bílý - stříbrný - lesklý AISI
Předbarvená ocel bílá - stříbrná
Následné barvení jakýmkoli odstínem RAL
Sublimace jakéhokoli obrazu a efektu
Hladký nebo děrovaný povrch

TYPE
Clip in staves

PERIMETER PROFILES
Perimeter Profiles “L” - “Double L” - “C”
According to the room dimensions

HANGERS
Standard with double spring

COLOURS | FINISHING | PERFORATION
White - silver - AISI prepainted aluminum
White - silver prepainted steel
Ral color post painting
Sublimation of any image and effect
Plain or perforated surface

LAMELA STAVE	MEZERA GAP	ROZMĚRY DIMENSIONS	HLINÍK TL. ALUMINUM THICK.	OCEL TL. STEEL THICK.	NOSNÍK | CARRIER		KRYT SPÁRY SHUTTER	SPOTŘEBA BM/M² INCIDENCES LM/SQM	
					TYP TIPOLOGY	MATERIÁL MATERIAL		LAMELY STAVES	NOSNÍK CARRIER
S 30 H38	21,5	L 28,5 - H 38	5/10 | 6/10	5/10	TE	OCEL/STEEL 6/10	HL/ALU 4/10	20	1
S 30 H40	20	L 30 - H 40	5/10 | 6/10	5/10	TE	OCEL/STEEL 6/10	HL/ALU 4/10	20	1
S 40 H40	**	L 40 - H 40	5/10 | 6/10	5/10	TE40	OCEL/STEEL 6/10	-	*	1
S 80	20	L 80 - H 14	5/10 | 6/10	5/10	TE	OCEL/STEEL 6/10	HL/ALU 4/10	10	1
S 130	20	L 130 - H 14	5/10 | 6/10	5/10	TE	OCEL/STEEL 6/10	HL/ALU 4/10	6,66	1
S 180	20	L 180 - H 14	6/10	5/10	TE	OCEL/STEEL 6/10	HL/ALU 4/10	5,00	1

*Proměnlivá spotřeba v závislosti na šířce mezery / * Variable incidence according to the gap width
** Proměnlivá mezera minimálně 20 mm / ** Minimum gap 20 mm

TŘÍDA 1
1 CLASS

TŘÍDA C
C CLASS

ŽÁDNÉ
NONE

A1-A2s1d0